
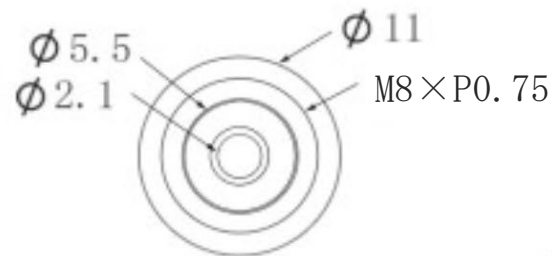


1 2 3 4 5 6 7 8 9 10
REV. DR. DATE

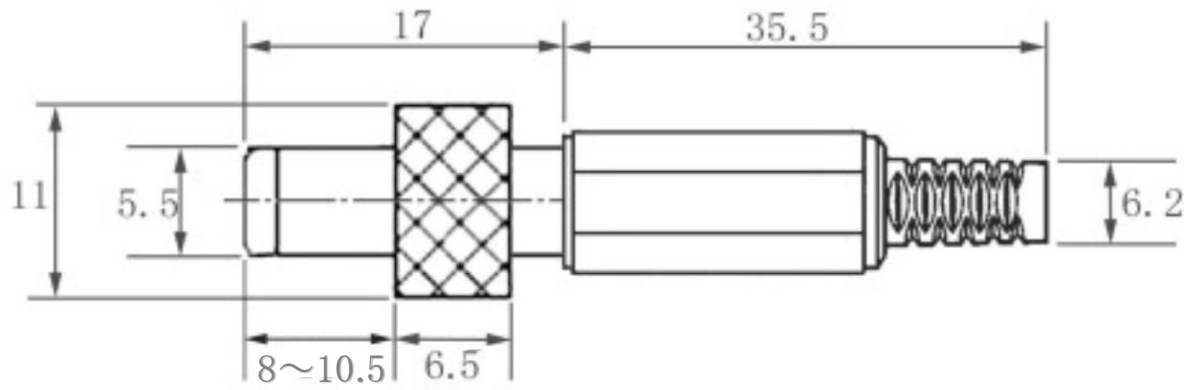

額定電流/電圧	5A/50V
絶縁抵抗	≧100MΩ
接続抵抗	≦30mΩ
耐圧(+と-間)	≧1500VAC/1min
寿命	≧1×10 ⁴ 回
使用湿度	98%(40℃)

UNITS MM	APPD:	
MAT'L	CHKD:	PRODUCT NAME: JT7009A
FINISH	DR:	TITLE:
		DWG NO.:
TOLERANCE: UNLESS OTHERWISE SPECIFIED	Q'TY 1	DATE: 2011.12.01
UNOER 1.5 ± 0.05	1.5 - 10 ± 0.1	OVER 10 ± 0.2
		SCALE SHEET REV.

1 2 3 4 5 6 7 8 9 10